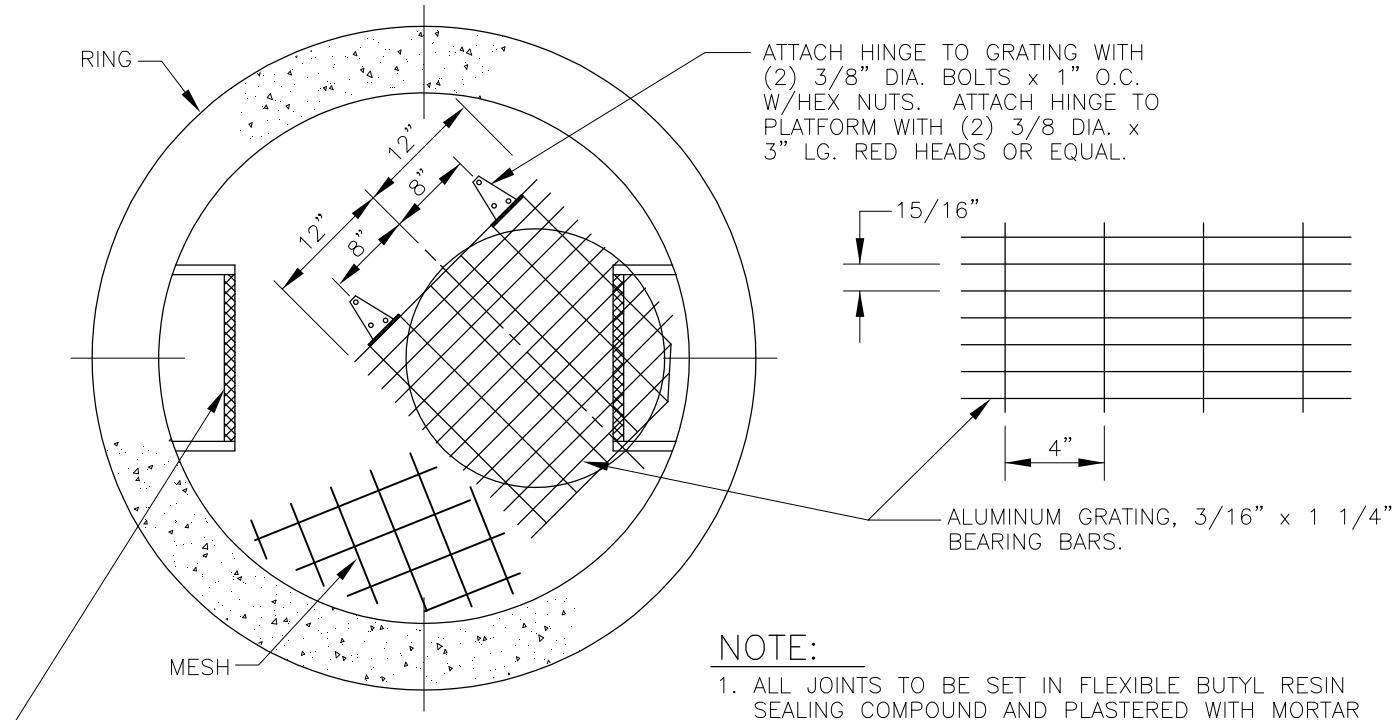

NOTE:

1. ALL JOINTS TO BE SET IN FLEXIBLE BUTYL RESIN SEALING COMPOUND AND PLASTERED WITH MORTAR 5/8" THICK AND EXTENDING 4" EACH SIDE OF JOINT INSIDE AND OUTSIDE.

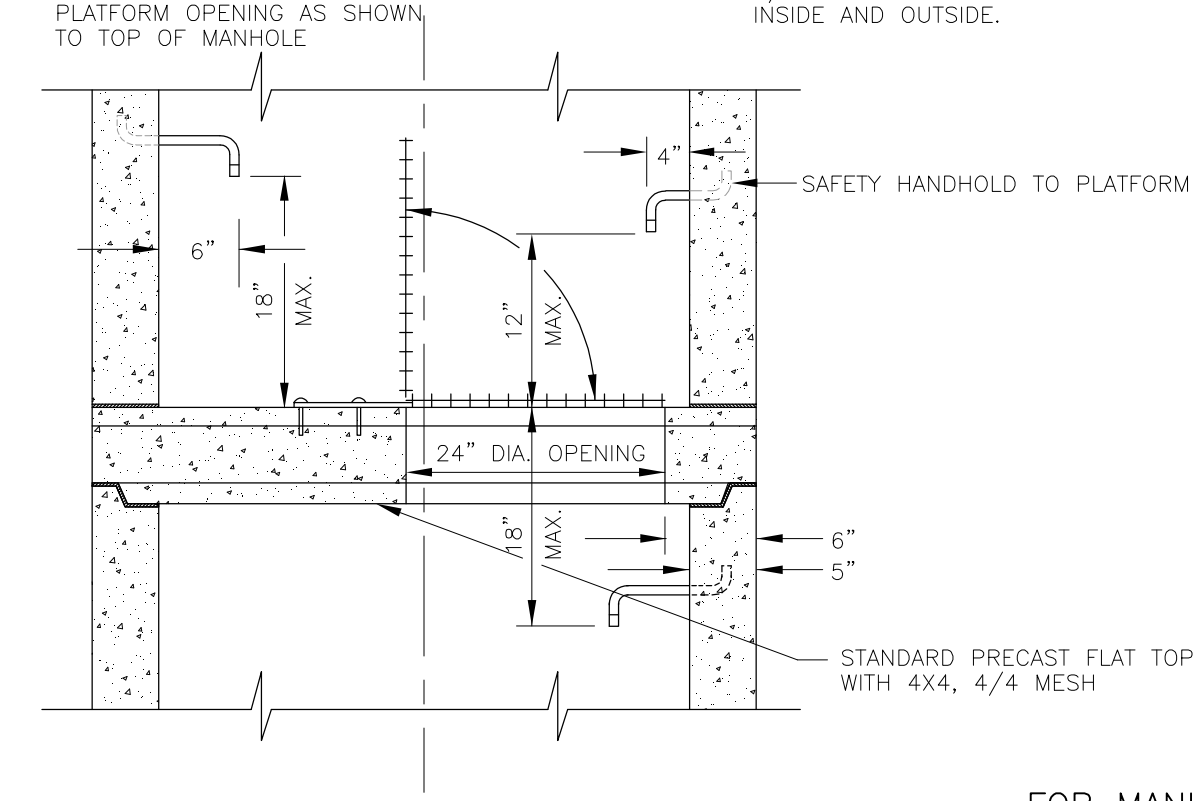

TO BE USED WHEN THE DISTANCE FROM INVERT TO TOP OF COVER EXCEEDS 17 FT.

FOR MANHOLES OVER 17' IN DEPTH

N.T.S.

	STANDARDS & SPECIFICATIONS	REVISED:	INTERMEDIATE PLATFORM
DATE:		DRAWING NO. 400-35	